


CRANE SUBFRAME

FIND THE MODEL COMPATIBLE WITH YOUR NEEDS

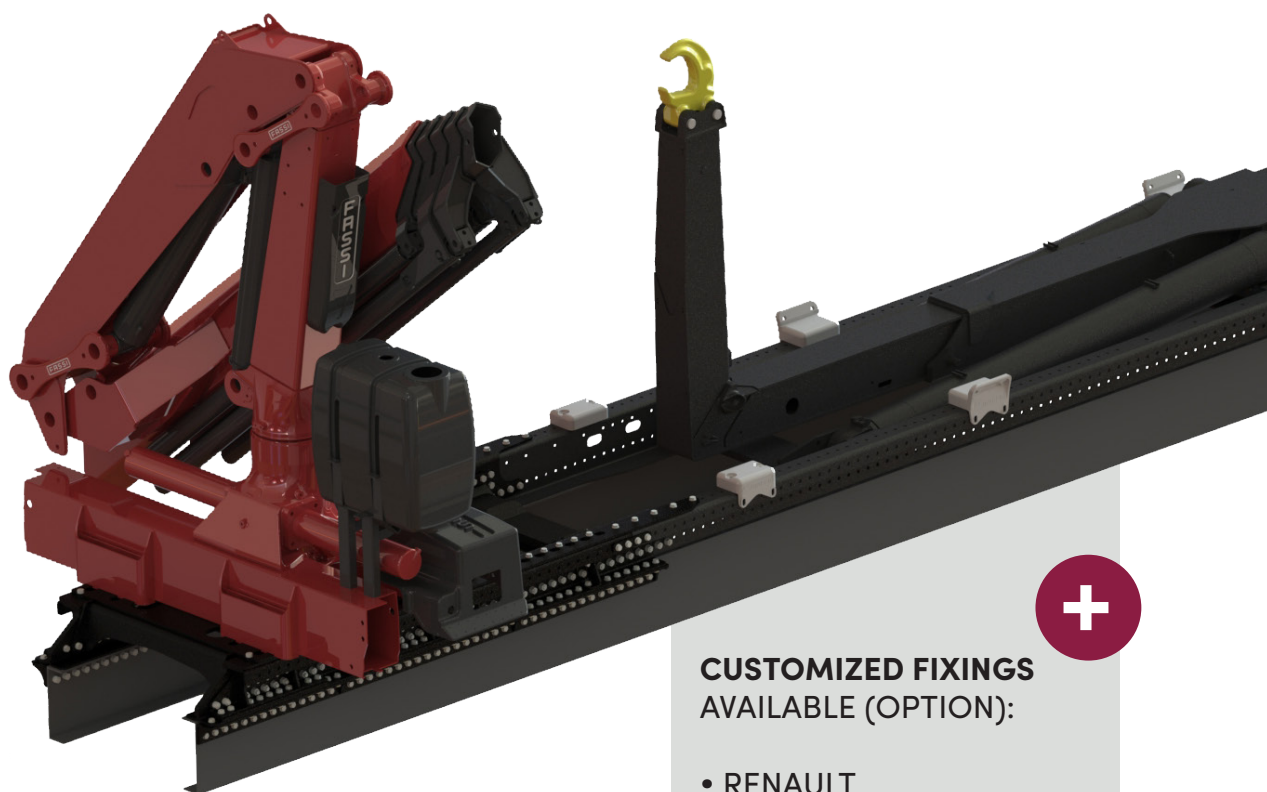

+

CUSTOMIZED FIXINGS
AVAILABLE (OPTION):

- RENAULT
- VOLVO
- MERCEDES
- IVECO
- SCANIA
- MAN
- DAF



**PLUG
& PLAY**

> PERFORMANCE

Productivity while assembling
(time saving) - on 6x2 / 6x4 / 8x4

> CONVENIENCE

Lightweight structure
& Adaptation to truck manufacturers


Discover it in video!




CRANE SUBFRAME

HOW TO CHOOSE **YOUR CRANE SUBFRAME**

- 1 Select the lifting capacity of the crane
0-30 Tm or 30-35 Tm
- 2 Choose the model depending on the chassis length
SHORT (1 550 mm) or LONG (2 150 mm)



- 3 Choose the right configuration
Non-drilled or Choice of the distance

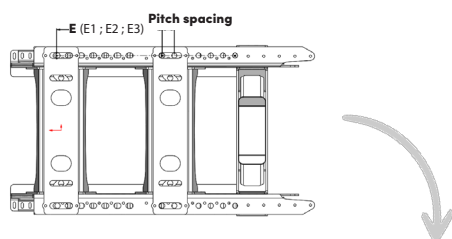

RANGE DESCRIPTION

S & SL RANGES		SHORT (L : 1 550)			
		Non drilled	E1 = 677 ±6 mm ; hole pitch = 78 mm (max distance 1 145 mm)	E2 = 735 ±6 mm ; hole pitch = 80 mm (max distance 1 215 mm)	E3 = 855 ±6 mm ; hole pitch = 90 mm (max distance 1 215 mm)
S	0-30 Tm	VAL05683	VAL05685	VAL05687	X
	30-35 Tm	VAL05695	X	VAL05697	VAL05699
SL	0 - 30 Tm	VAL05707	VAL05709	VAL05711	X
	30 - 35 Tm	VAL05719	X	VAL05721	VAL05723

S & SL RANGES		LONG (L : 2 150)			
		Non drilled	E1 = 677 ±6 mm ; hole pitch = 78 mm (max distance 1 145 mm)	E2 = 735 ±6 mm ; hole pitch = 80 mm (max distance 1 215 mm)	E3 = 855 ±6 mm ; hole pitch = 90 mm (max distance 1 215 mm)
S	0-30 Tm	VAL05689	VAL05691	VAL05693	X
	30-35 Tm	VAL05701	X	VAL05703	VAL05705
SL	0 - 30 Tm	VAL05713	VAL05715	VAL05717	X
	30 - 35 Tm	VAL05725	X	VAL05727	VAL05729