



TIPPER SCISSORS

2-WAY & 3-WAY TIPPER SCISSORS



> PERFORMANCE

Unrivalled lifting power ensuring smooth and safe operation.

> ERGONOMICS

Small footprint for easy integration in confined spaces.

> DESIGN

An optimised structure that combines efficiency and aesthetics.

> VERSATILE INTERFACE

Easy to adapt to different vehicle configurations.


> ROBUSTESSE

Use of high performance steel (HTS)

2-WAY / 3-WAY TIPPER SCISSORS

TIPPER SCISSORS

2-WAY & 3-WAY TIPPER SCISSORS

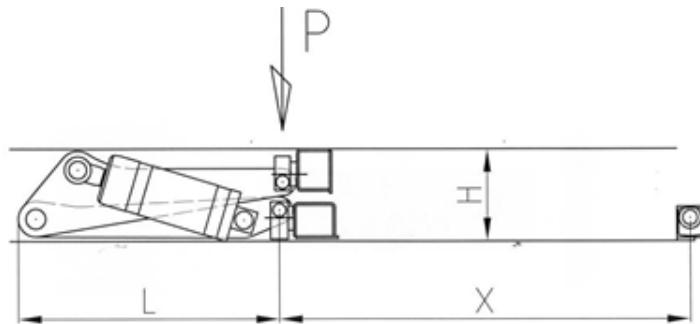

Type	GVW	Pressure 350 bar	L	H	W	Weight	Oil volume	X	TIPPING ANGLE	
									Rear	Lateral
TIPPER SCISSORS 3W 32 T 200/615										
3W 200/615	32T 4 AXLES	28 500	1 500	480	460	550	19	2 250	57	48
									2 350	
									54	
									52	
									50	
TIPPER SCISSORS 3W 26 T 200/420										
3W 200/420	26T 3 AXLES	24 200	1 245	380	465	450	13	1 790	58	48
									55	
									52	
									49	
									47	
TIPPER SCISSORS 3W 19 T 150/410										
3W 150/410	19T 2 AXLES	15 850	1 185	365	395	275	7	1 615	57	48
									54	
									51	
									48	
									45	

The values and sketches indicated are not contractual. We give ourselves the right to modify them without notice.
Marrel technicians are at your service to recommend the best choice for your application.

2-WAY / 3-WAY TIPPER SCISSORS